

OP-GOLT 72404

4 PON PORTS GPON OLT



Product Description

GPON OLT OP-GOLT 72404 completely meet relative standard of ITU G.984.x and FSAN, which is 1U rack-mounted device with 1 USB interface, 4 uplink GE ports, 4 uplink SFP ports, 2*10GE uplink ports and 4 GPON ports. Each GPON port supports the splitting ratio of 1:128. The GPON system supports up to 512 terminal connections.

This product meets the requirements in device performance and size of compact server room as the product has high performance and compact size, which convenient and flexible to use, and is easy to deploy as well. Moreover, the product meets the requirements of promoting network performance, improving reliability and reducing power consumption in the perspective of access network and enterprise network and is applicable to three-in-one broadcast television network, FTTP (Fiber to the premise), video monitoring network, enterprise LAN (Local Area Network), internet of things and other network applications with a very high price/performance ratio.



High Speed CPU



Low Power Consumption



Software Customization




Higher Speeds

Copyright © Optilink Networks Pvt. Ltd, All Rights Reserved.

OP-GOLT 72404

4 PON PORTS GPON OLT

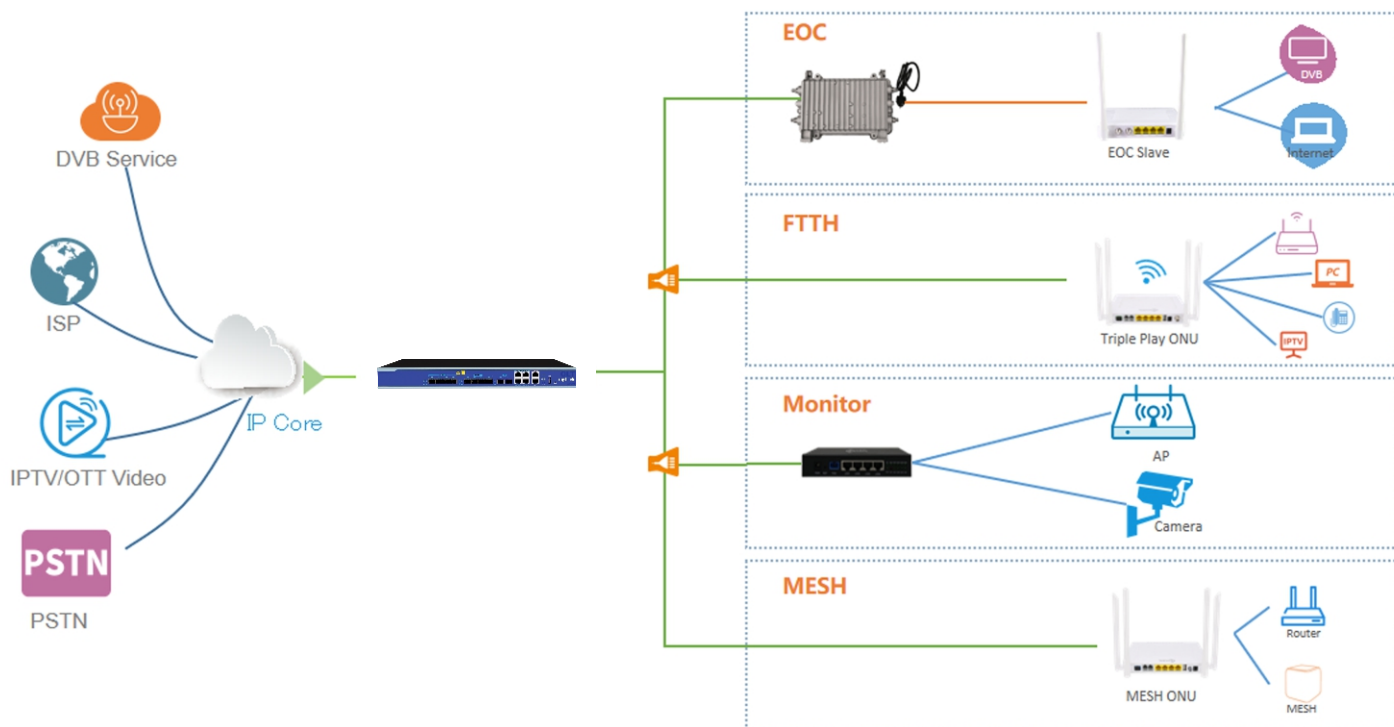

Functional Feature

- Meet ITU-T G.984/G.988 standard
- Support OMCI Protocol
- 1U height 8PON OLT product in compact design of Pizza-Box
- Fan speed adjust automatically
- 1+1 Pluggable power module
- Complete PON protection switching function
- Layer 2 Switching Function

OLT equips with very powerful layer 2 Full Wire Speed Switching and completely supports layer 2 protocol. OLT supports varieties of layer 2 functions like TRUNK, VLAN, LACP, rate limit,



High Speed CPU



Low Power Consumption



Software Customization



Higher Speeds

OP-GOLT 72404


4 PON PORTS GPON OLT



port isolate, queue technology, flow control technology, ACL and so on, which provides technical guarantee for the development of multi-service integrated.

- QOS Guarantee
- GPON Products maintains fully-improved DBA with excellent QoS service capabilities. DBA meets different QoS requirements from different service flow in latency, jitter, packet loss rate.
- Easy-to-Use Management System
Support management method of CLI, WEB, SNMP, TELNET, SSH and meet OMCI standard, through OMCI channel protocol service management can be realized, including ONT function parameter set, T-CONT service lines and amount, Qos parameters, configuration information request, performance statistics, auto-reporting of running events in system, configuration for ONT from OLT, fault diagnosis and management of performance and safety.

Product Interface

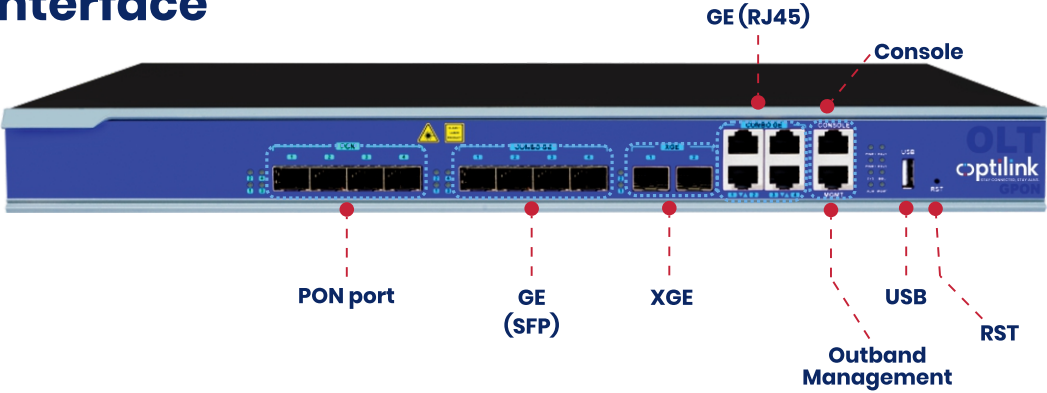

Product Specification

ITEM		OP-GOLT 72404
Rack	Type	1U 19-inch standard box
Uplink Port	COMBO port	4*10/100/1000M auto-negotiation Ethernet ports
		4 SFP interfaces
	10-Gigabit	2 SFP+ interfaces

OP-GOLT 72404

4 PON PORTS GPON OLT

PON Port	Quantity	4	
	Physical interface	SFP	
	Interface type	GPON: ITU-TG.984.2 Class B+/Class C+	
	Max splitting ratio	GPON: 1:128	
Management Port		1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port	
USB Port		1 USB interface (It's used to backup configuration, upgrade program, and record log information)	
PON PORT attribute	Transmission distance	20KM	
	Port rate	GPON: Downstream: 2.5Gbps Upstream: 1.25Gbps	
	Wavelength	Forwarding: 1490nm Receiving: 1310nm	
	Interface type	SC/UPC	
	Fiber type	9/125μm SMF (Single Mode Fiber)	
	Light transmission power	Class B+: +1.5 ~ +5dBm	Class C+: +3 ~ +7dBm
	Receiving sensitivity	Class B+: -28dBm	Class C+: -30dBm
	Saturation power	Class B+: -8dBm	Class C+: -12dBm
Network management method		Support CLI、SNMP、TELNET、SSH、WEB	
Business capabilities		Support device log, device upgrade, device management, condition monitoring, configuration management, and user management Layer 2 switching configuration management: Like port management, VLAN, RSTP, IGMP, ACL, QOS and so on. PON function configuration management: Like OLT authentication, DBA template, service template, line template and so on. Layer 3 function: support static routing, dhcp-relay and vlanif configuration.	
Backplane Bandwidth		63G	
Size		440mm(L)*276mm(W)*44mm(H)	
Business capabilities		4.0Kg	
Power supply	220VAC	AC: 100V ~ 240V, 47~63Hz	
	-48DC	DC:-40V ~ -72V	
	BBU (Backup Battery Unit)	DC: 11V ~ 14V Function: When the regular power supply is cut off, it can be switched to the backup power supply, and when the regular power supply resumes, it will switch back to the regular power supply and charge the backup power supply.	
Maximum power		45W	
Working Environment	Working temperature	-15 ~ 50°C	
	Storage temperature	-40 ~ 85°C	
	Humidity	5 ~ 90% (Non-condensing)	



2009

One of the first to provide convergence of DATA, VOICE, INTERNET & Entertainment through fiber to the home (FTTH)



optilink

STAY CONNECTED, STAY ALIVE.





2000

Pioneered the fiber optic to cable TV in INDIA as a solution to transmission of signals over long distance



2015

Ibuildings - The integration of various services, utilities & gadgets through a signal optic fiber cable & IP network for a truly seamless experience.



1990

Ushered in the cable TV revolution in INDIA. Today, we have the unique accomplishment of providing tens of millions of cable TV installation in INDIA & neighboring countries.



2005

Initiated internet through optic fiber for efficient broadband connectivity



2019

Started assembly manufacturing gradually proceeding to SMT line manufacturing through EMS in INDIA. Now in 2023 manufacturing ONT, Switches, SFP Modules & Patch Cords

Optilink Networks Pvt. Ltd.

Mumbai | New Delhi | Kolkata | Hyderabad

Registered Address:

501-502, Sanjona Complex, Plot No. 11-A,
Hemu Kalani Marg, Above SBI, Chembur
East. Mumbai-400071. Maharashtra. India

Factory Address:

Gala No-07, C-06, Bhumi World, Industrial
Park, Pimpalas Village, Mumbai-Nashik Highway,
Bhiwandi-421302. Thane. Maharashtra.

✉ sales@optilinknetwork.com
Ph: +91-22-2522 5511/7711

✉ support@optilinknetwork.com
☎ +91-7666811666

CIN: U51109MH2006PTC159903
GSTIN: 27AAACO8095Q1ZK

Follow us on:



www.optilinknetwork.com